


Welsh Slate

+44 (0) 1248 600656 www.welshslate.com

Mechanically Fixed Tiled Hip Detail
Penrhyn Heather Blue 500x300 County 7.0mm

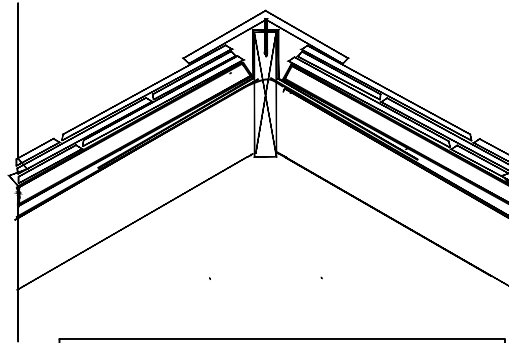

A length of underlay should be taken over the hip and overlap general underlay by 150 mm min.

Slates should be cut to fit neatly at the hip ensuring slates can be securely fixed. Use extra wide slates where necessary.

Fix an extra hip batten 50x38 mm to rafters with purpose made hip batten clips.

Make weathertight with hip tiles to true lines with edges and joints solidly bedded in mortar, neatly struck off as work proceeds. Secure hip tile with an appropriate screw fixing with sealing washer.

Mortar mix for hip tiles should be 1:3 cement:sand pigmented to approved colour. If necessary the underside of the hip tile can be coated with a mortar and an adhesive additive slurry to aid bond.

Fill ends of neatly cut hip tiles with mortar and slips of slate struck flush.