

Installation Instructions

YORK 2 IN 1 - TWO WAY GATE

Tel: 01782 339348 Fax: 01782 339349

sales@centrewire.com

www.centrewire.com


Mossfield Road, Adderley Green, Longton, Stoke-on-Trent, ST3 5BW




Kit comprises of

- 1 x Bridle Gate - Two way
- 1 x 7 Rail Gate x/w hooks on slam stile
- 1 x 25mm Heavy Duty Bolt on padlockable drop bolt
- 1 x Fitting Kit
- 1 x Easy Clean Drop Bolt Ground Socket
- 2 x Adj bolts M20mm x 150mm c/w 2 nuts
- 1 x Jaw Type Hinge on 200mm M20 studding c/w 2 nuts

YORK 2 IN 1 - TWO WAY GATE

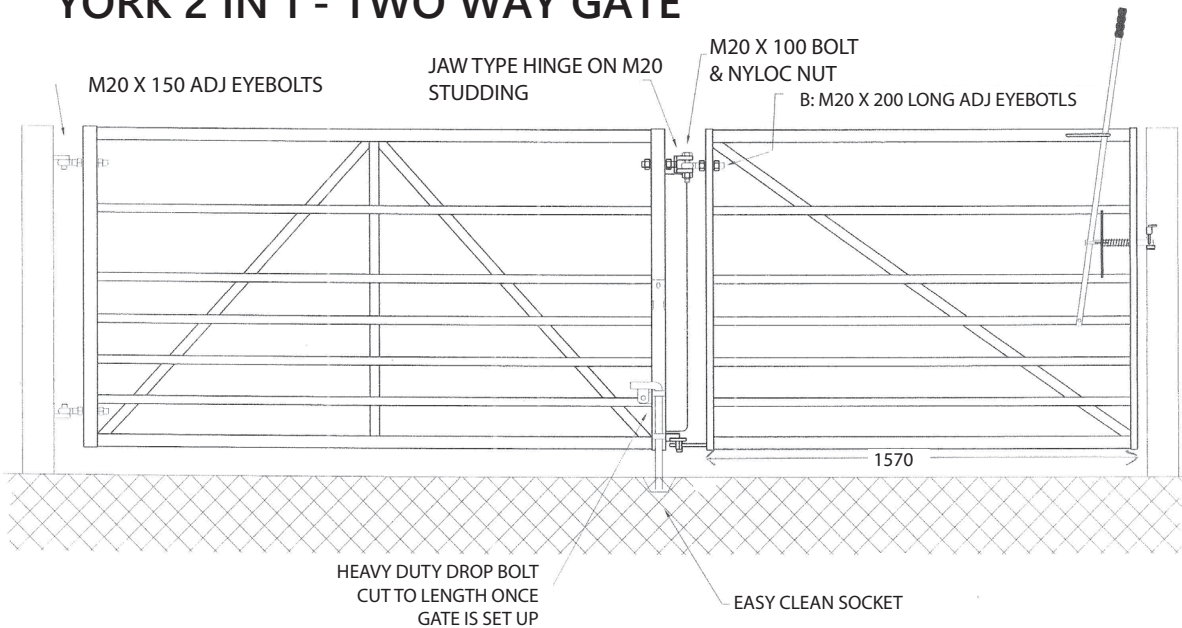

CONTROLLED SPEED HINGE SYSTEM

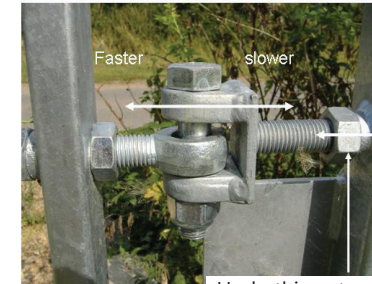

Undoing the nuts on either side of the hang post on this threaded enables you to move the pivot point assembly nearer the hang post (slower) or further away from the hang post (faster)

Undo this nut and the one on the opposite face of the hang post to allow you to move the whole pivot assembly in or out

Once the correct speed has been obtained, retighten the two bolts to maintain the new pivot point position.

By adjusting the position of the pivot point in relation to the bottom hinge the gate will either close more quickly or more slowly.

THIS ADJUSTMENT MUST BE MADE ON SITE ONCE THE GATE HAS BEEN INSTALLED.



If you need any further advice/guidance regarding the installations of any of our products please contact the office.

Centrewire®