


Welsh Slate  
+44 (0) 1248 600656 [www.welshslate.com](http://www.welshslate.com)

Open Leaded Valley Detail  
Penrhyn Heather Blue 500x300 County 7mm

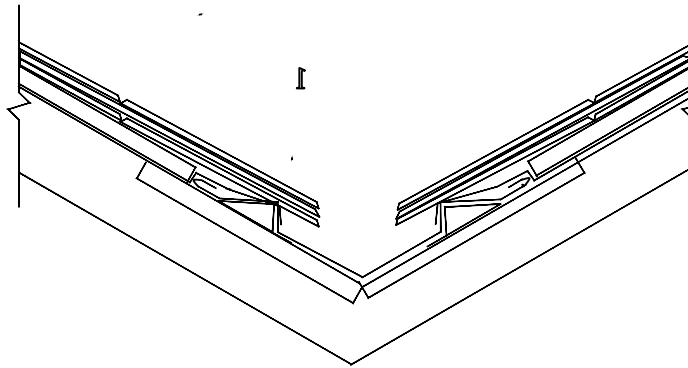

Provide suitable timber base 225 mm wide x 19 mm thick to either side of valley. The top of timber boards should be equal to either the top of the rafter or counterbatten if present

Fix tilting fillets to either side of valley boards to provide a 75 mm vertical upstand from the centre of the valley.

Lay Code 5 lead of adequate width to cover tilting fillets and provide a 25 mm welt. Lead should be of maximum length 1500 mm and fixed with copper nails at the head.

Underlay should be cut neatly to suit the valley opening and be carried over the tilting fillet into the gutter.

Slates and extra wide slates as necessary should be cut to provide a straight valley opening. Cut slates should extend 50 mm beyond the tilting fillet.