



Type 2 Bridleway Construction Plan Scale 1/20

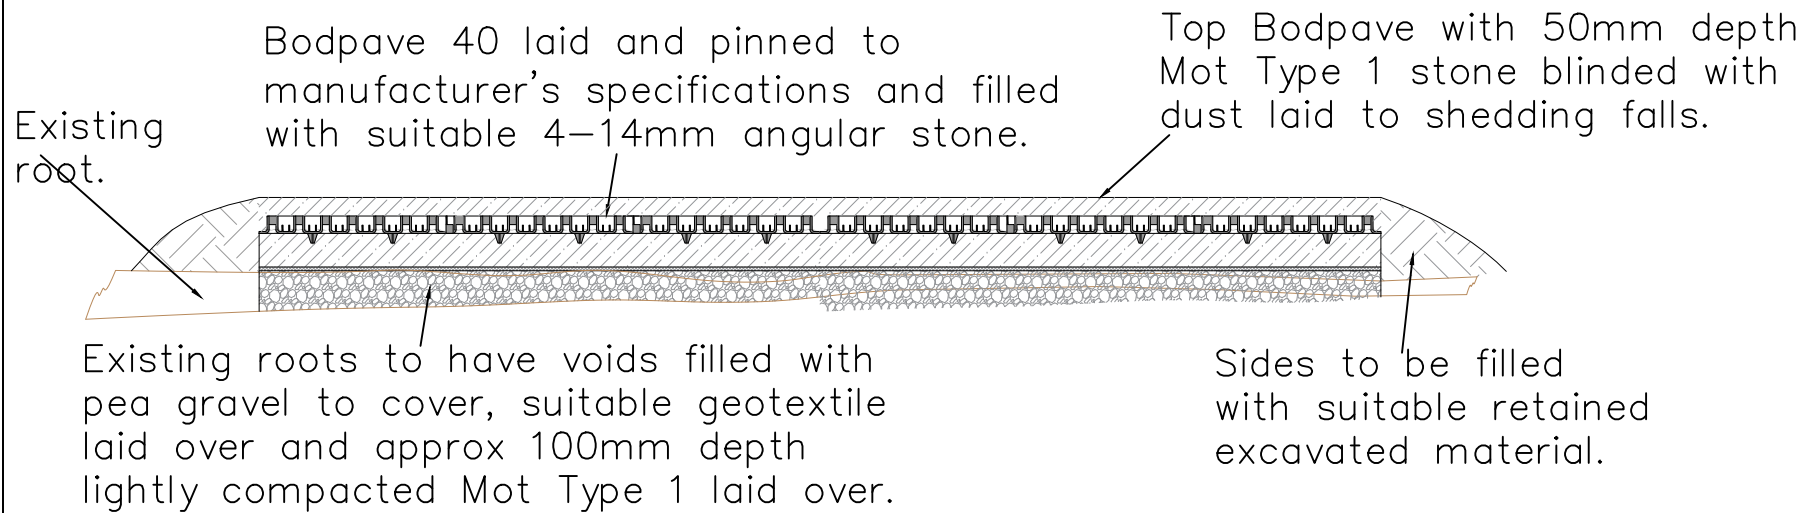

Type 2 Bridleway Construction Section Scale 1/20

Falls of surface to be 1 in 40 and direction of fall is to suit path location as instructed by Engineer.

150mm depth recycled Mot Type 1 compacted stone laid, compacted and blinded with dust with top 50mm with shedding falls to sides.

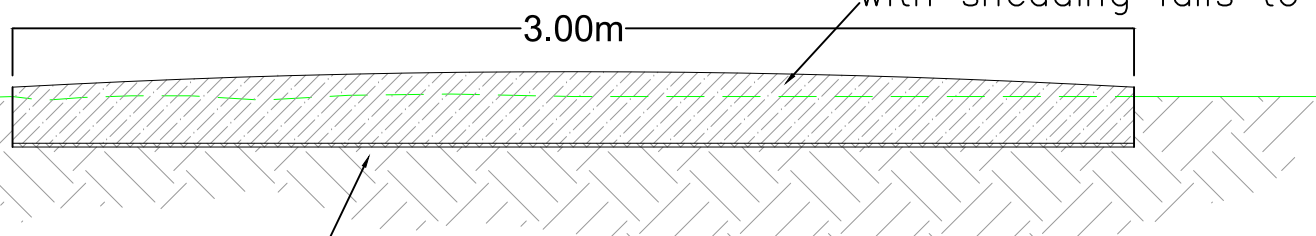

Type 1 Bridleway Construction Section Scale 1/20.

Terram 1000 geotextile or similar approved.

Road to be overlaid to be swept clean of all detritus and have suitable tack coat applied Colas Colbond 50 Polymer Modified emulsion applied at min spread rate of 1 ltr/m². Surface to be overlaid with 35mm depth AC10 Dense Surf 100/150 to BS EN13108-1.



Type 3 Bridleway Construction Section Scale 1/20.

Any bitmac failures to be square cut out and regulated with AC10 Dense Bin 100/150 to BS EN13108-1 max depth 30mm.



PROJECT:
LOMESHAYE INDUSTRIAL ESTATE
BRIDLEWAY CONSTRUCTION

TITLE:
PROPOSED BRIDLEWAY
CONSTRUCTION DETAILS

DRAWN BY: J D Austin

CHECKED: S Whalley

DATE: JUNE 2021

FILE REF: XXXX

SCALE: 1/20 at A3

DRAWING NUMBER: E0746 D02A