

Do not scale this drawing (printed or electronic versions)

Contractors must check all dimensions from site

This drawing is copyright and is for use on this site only

All other design team elements, where indicated, have been imported from the engineers drawings and reference should be made to the individual engineers drawings for exact setting out, size and type of component.

Discrepancies and/or ambiguities within this drawing, between it and information given elsewhere, must be reported immediately to this office for clarification before proceeding.

All works to be carried out in accordance with the latest British Standards, Codes of Practice unless specifically directed otherwise in the specification.


Responsibility for the reproduction of this drawing in paper form, or if issued in electronic format, lies with the recipient to check that all information has been replicated in full and is correct when compared to the original paper or electronic image. Graphical representations of equipment on this drawing have been co-ordinated, but are approximations only. Please refer to Specifications and / or Details for actual sizes and or specific contractor construction information.

SAFETY, HEALTH AND ENVIRONMENTAL INFORMATION


For Construction Design Management (CDM) risk assessment please refer to document number:

It is assumed that all works on this drawing will be carried out by a competent contractor, working where appropriate to an approved method statement.

Kitchen A

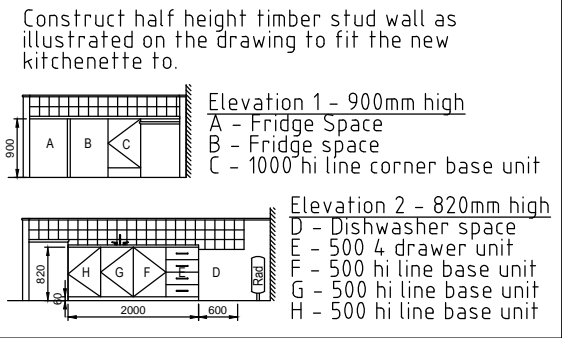

Kitchen B

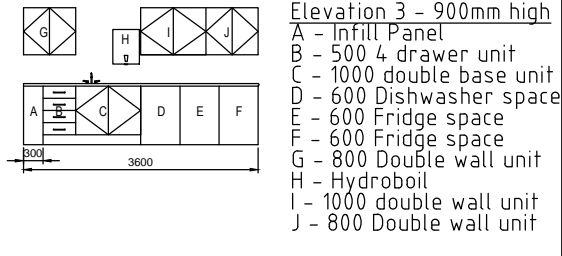

Ceiling Schedule

Office Zone 1 & 3

Remove existing suspended ceiling retaining existing shadow battens and bulk heads and replace with new suspended ceiling complete with grid

Office Zone 2

Remove existing suspended ceiling and all associated fittings to expose existing plaster ceiling finish and ornate principle trusses

Upper Mezzanine floors

Existing stippled artex ceiling to be made good following the removal of existing partitions by under lining with plasterboard with a plaster skim finish and painted with white emulsion.

New Doors

Supply and fit new solid core Ash veneer doors as per the door schedule

Board room

Construct boardroom enclosure using demountable partitioning system. Solid panels inset into white powder coated exposed frame with borrowed lights up to suspended ceiling height.

•	•	•	•
•	•	•	•
•	•	•	•
•	•	•	•
•	•	•	•
•	•	•	•
•	•	•	•
•	•	•	•

Rev	Description	Date	By	Chk
•	Client Approval Status			
•	A - Approved			
•	B - Approved with comments			
•	C - Amend with comments and re-submit			
•	D - Do not use			

Purpose of Issue	TENDER	Status
Client		
C:\Capita\Capita_Standard\Drawing_Template\Capita\Drawing\0001.dwg		

Project no.
CS/046854-05

Project Title
Swindon Capita Partnership
CLARENCE HOUSE - FIRST FLOOR REFURBISHMENT

Drawing Title
PROPOSED FIRST FLOOR PLAN
BUILDERS WORKS

Scale 1:100@A2 Drawn By SJB Checked By IP Approved By PS

Issue date 14-11-2012

location	originator	zone	level	file type	discipline	number	rev
CH	CS	ZZZZ	G01	DFP	BS	004	

CAPITA SYMONDS

Civic Offices, Euclid Street, Property Services
Wat Tyler House West 2nd Floor SWINDON SN1 2JH
www.capita.co.uk