


Welsh Slate

+44 (0) 1248 600656 www.welshslate.com

Bedded & Mechanically Fixed Clay Angle Ridge Tile Detail Penrhyn Heather Blue County 7mm

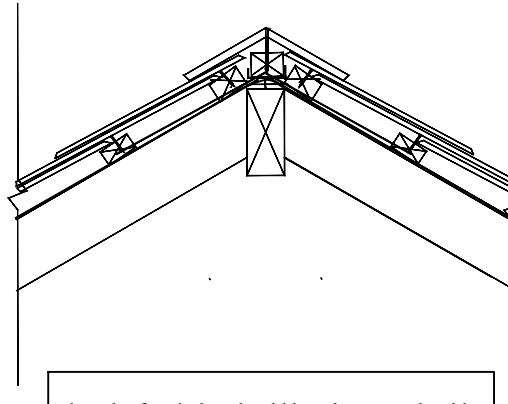

A length of underlay should be taken over the ridge and overlap general underlay by 150 mm min.

Slating should be finished with a short course of slates cut to maintain headlap and gauge, which are twice head nailed.

Fix an extra ridge batten 50x38 mm to rafters with purpose made ridge batten clips.

Make weathertight with ridge tiles to true lines with edges and joints solidly bedded in mortar, neatly struck off as work proceeds. Secure ridge with an appropriate screw fixing with sealing washer.

Mortar mix for ridge tiles should be 1:3 cement:sand pigmented to approved colour. If necessary the underside of the ridge can be coated with a mortar and an adhesive additive slurry to aid bond.

Fill ends of ridges at gables with mortar and slips of slate struck flush.